

## Pruning bars PNP

Special light pruning machines, intended especially for pruning of hedges or thinner branches up to 5 cm in orchards, saw blades d400 mm, 80 teeth, can be aggregated with US or STS posts, hoses length up to 250 cm.


*It is necessary separate free-flow outlet to connect the equipment.*

Model	PNP-xxx										
	240	250	350	252	253	254	255	352	353	354	355
<b>Working width of</b>											
<b>(A) upper bar [cm]</b>	70		101	70				101			
<b>(B) vertical bar [cm]</b>	132	164									
<b>(C) lower bar [cm]</b>	-			70	101	132	164	70	101	132	164
<b>Lenght [cm]</b>	47										
<b>Width [cm]</b>	90		121	90				121			
<b>Height [cm]</b>	161	192		262	293	324	356	262	293	324	356
<b>Circular saws [mm]</b>	ø 400/80 teeth										
<b>Version</b>	right-sided / left-sided										
<b>Oil consumption [l/min]</b>	32										
<b>Tractor power [kW]</b>	min 10										
<b>Working speed [km/h]</b>	2 - 4										
<b>Weight</b>											
<b>with mechanical tilting of pruning bars [kg]</b>	83	95	105	126	136	147	159	136	146	157	169
<b>with hydraulic tilting of pruning bars [kg]</b>	+ 9			+ 18							
<b>with automatic movement of pruning bar [kg]</b>	+ 32							-			

\* Listed technical data are informative, manufacturer reserves the right to change design and equipment of the machines without prior notice. The machine can be also modified according to the customer's request.

\*\* Another version and combination on a request.

\*\*\* The working speed may vary depending on the specific working conditions.

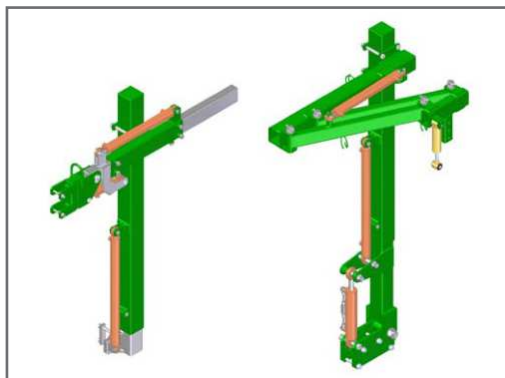

## Suspension posts US and STS

Multipurpose suspension posts designed to connect working tools Ostraticky with tractor or another carrier. Including hydraulic hoses and quick couplings, hoses length up to 250 cm.

Model	US		STS	
Lift height [cm]	0	60	60	100
Tilting of suspension post	without		mechanical / hydraulic	
Tilting range of suspension post [°]	-	-	+25 / -18	
Carrying arm	side		side / upper	
Side shift	mechanical / hydraulic			
Side shift range [cm]	32 / 40 / 60			
Tilting of working tool	mechanical / hydraulic			
Tilting range of working tool [°]	mechanical +18 / -18, hydraulic +21 / -21			
<b>Width</b>				
with side carrying arm [cm]	111 - 212			
with upper carrying arm [cm]	-	-	102 - 203	
Height [cm]	165		167 / 204	212
Lenght [cm]	34		31	
Number of hydraulic circuits	0/1/2	1/2/3	1/2/3/4	1/2/3/4
Oil consumption [l/min]	10			
Aggregation with tractor	front			
<b>Weight</b>				
suspension post [kg]	27	51	72 - 96	
carrying arm one-sided [kg]	34 - 47			
carrying arm double-sided [kg]	68 - 94			

\* Listed technical data are informative, manufacturer reserves the right to change design and equipment of the machines without prior notice. The machine can be also modified according to the customer's request.

\*\* Another version and combination on a request.