



Pruning bars SLA


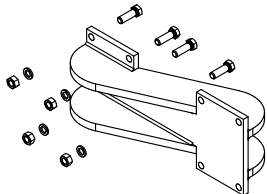

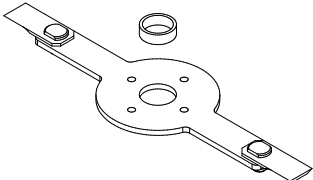

Pruning bars for mechanization of pruning fruit or ornamental trees and hedges or for pruning roads in the forests. Pruning with saw blades driven by the rotating hydraulic motor. Without hydraulic hoses. Can be aggregated with SLx suspension.

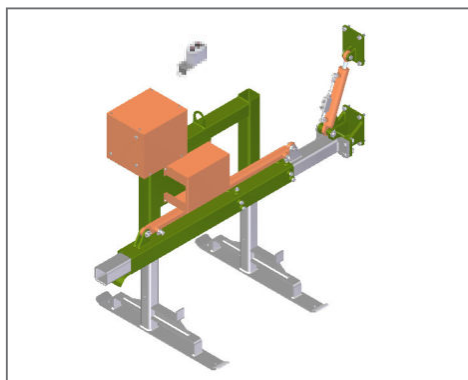
Attention! It is necessary separate free-flow outlet or SLOOBTVENT to connect the equipment.

pruning bars SLA - with saw blades d450, 80 teeth		order no.	
	SLA-2480R, right <i>(2 saw blades, working length 90 cm)</i>	SLA2480R	
	SLA-3480R, right <i>(3 saw blades, working length 135 cm)</i>	SLA3480R	
	SLA-4480R, right <i>(4 saw blades, working length 180 cm)</i>	SLA4480R	
	SLA-5480R, right <i>(5 saw blades, working length 225 cm)</i>	SLA5480R	
	SLA-2480L, left <i>(2 saw blades, working length 90 cm)</i>	SLA2480L	
	SLA-3480L, left <i>(3 saw blades, working length 135 cm)</i>	SLA3480L	
	SLA-4480L, left <i>(4 saw blades, working length 180 cm)</i>	SLA4480L	
	SLA-5480L, left <i>(5 saw blades, working length 225 cm)</i>	SLA5480L	

pruning bars SLA - with saw blades d450, 56 teeth		order no.	
	SLA-2456R, right <i>(2 saw blades, working length 90 cm)</i>	SLA2456R	
	SLA-3456R, right <i>(3 saw blades, working length 135 cm)</i>	SLA3456R	
	SLA-4456R, right <i>(4 saw blades, working length 180 cm)</i>	SLA4456R	
	SLA-5456R, right <i>(5 saw blades, working length 225 cm)</i>	SLA5456R	
	SLA-2456L, left <i>(2 saw blades, working length 90 cm)</i>	SLA2456L	
	SLA-3456L, left <i>(3 saw blades, working length 135 cm)</i>	SLA3456L	
	SLA-4456L, left <i>(4 saw blades, working length 180 cm)</i>	SLA4456L	
	SLA-5456L, left <i>(5 saw blades, working length 225 cm)</i>	SLA5456L	

pruning bars SLA - with saw blades d600, 56 teeth		order no.	
	SLA-3656R, right <i>(3 saw blades, working length 180 cm)</i>	SLA3656R	
	SLA-4656R, right <i>(4 saw blades, working length 240 cm)</i>	SLA4656R	
	SLA-5656R, right <i>(5 saw blades, working length 300 cm, cannot be mounted on suspension SL1)</i>	SLA5656R	
	SLA-3656L, left <i>(3 saw blades, working length 180 cm)</i>	SLA3656L	
	SLA-4656L, left <i>(4 saw blades, working length 240 cm)</i>	SLA4656L	
	SLA-5656L, left <i>(5 saw blades, working length 300 cm, cannot be mounted on suspension SL1)</i>	SLA5656L	

supplements and accessories		order no.	
	set of bypass valves <i>(it is necessary when connecting the bar to the double-acting hydraulic circuit, it is necessary to ensure oil leakage from the hydraulic motor, e.g. with SL4NHADxx)</i>	SLOOBTVENT	
	bar advance spacer, displacement 35 cm	CS530.201000	
	set of trimming knives for pruning bars SLA-x4xx (including modified flange)	CS510.910MS1	
	set of trimming knives for pruning bars SLA-x4xx	CS520.910001	
	SLA pruning bar support	CS510.401060	



Suspension SL4

Suspension for connection of the SLA and SLP pruning bars to a telescopic handlers, loaders or tractor loaders, pruning bar support. Including hydraulic hoses and quick couplings, hoses length up to 150 cm.

It is necessary to specify the exact type of carrier or the connection dimensions, when ordering.

suspension SL4, for telescopic manipulators		order no.	
	suspension SL4, type I - left-sided - suitable for Caterpillar, Faresin, Liebherr, Manitou and other manipulators - hydraulic side shift 100 cm - hydraulic tilting 0° / +105°, pilot operated check valve of tilting hydraulic cylinder - electro-hydraulic switch for control by 1 double-acting hydraulic circuit - oil leakage hose reel, electrohydraulic switch cable reel	SL4RAM01000	
	suspension SL4, type II - left-sided - suitable for Dieci, JCB, Kramer, Merlo, New Holland and other manipulators - hydraulic side shift 100 cm - hydraulic tilting 0° / +105°, pilot operated check valve of tilting hydraulic cylinder - electro-hydraulic switch for control by 1 double-acting hydraulic circuit - oil leakage hose reel, electrohydraulic switch cable reel	SL4RAM02000	
suspension SL4, for tractor loaders		order no.	
	suspension SL4, type III - right-sided - suitable for Quicke, Tracklift and other tractor loaders - hydraulic side shift 100 cm - hydraulic tilting 0° / +105°, pilot operated check valve of tilting hydraulic cylinder	SL4RAM03000	
	hydraulic diverging, built-in (control of 2 functions by 1 hydraulic circuit)	HYDRVESTSL4	
	hydraulic diverging ECO, built-in (control of 3 functions by 1 hydraulic circuit)	HYDRECOSL4	
	set of side marker lights (it is necessary for transportation on public roads)	SVSSL4	