



Pruning bars SLP

Pruning bars for mechanization of pruning fruit or ornamental trees and hedges, pruning with saw blades driven by the rotating hydraulic motor. Without hydraulic hoses. Can be aggregated with SLx suspension.


Attention! It is necessary separate free-flow outlet or SLOOBTVENT to connect the equipment.

Model	SLP			
	24xx	34xx	44xx	54xx
Working width [cm]	90	135	180	225
Lenght [cm]	45			
Width [cm]	45			
Height [cm]	90	135	180	225
Circular saws [mm]	ø 450/80 teeth			
Material of pruning saws	high-quality steel ocel			
Version	upper / lower		vertical	
	right-sided / left-sided			
Oil consumption [l/min]	min 55			
Tractor power [kW]	min 20	min 30	min 40	min 50
Working speed [km/h]	2 - 4			
Weight [kg]	79	112	148	185

* Listed technical data are informative, manufacturer reserves the right to change design and equipment of the machines without prior notice. The machine can be also modified according to the customer's request.

** Another version and combination on a request.

*** The working speed may vary depending on the specific working conditions.

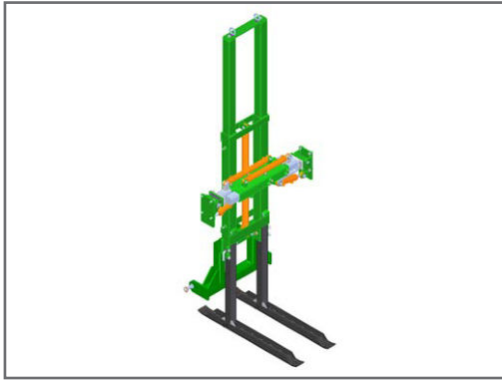

Suspension SL3

Suspension for connection of the SLA and SLP pruning bars to a tractor or another carrier. Pruning bar support, including hydraulic hoses and quick couplings, hoses length up to 250 cm for front suspension, up to 150 cm for rear suspension.

Model	SL3	
Version	one-sided	double-sided
Lift height [cm]	100	
Side shift range [cm]	40	2x40
Tilting range [°]	-5 / +15	
Lenght [cm]	54	65
Width [cm]	141	150
Height [cm]	325	
Aggregation with tractor	front	
Oil consumption [l/min]	10	
Weight [kg]	385	465

* Listed technical data are informative, manufacturer reserves the right to change design and equipment of the machines without prior notice. The machine can be also modified according to the customer's request.

** Another version and combination on a request.